

Language EN

Product Details

Title of flying system: **Banana/Big-Banana & Verlängerung**

Item number of hanger: 1611

Item number of adapter: 15010

Max. payload of system: 53 kg

Included mounting material: 10 Pieces Adjustable clamping lever GN 300-63-M10-25-SW

Manufacturer Information

PL-audio GmbH & Co. KG

Siegener Straße 6

D-57482 Wenden

Tel.: +49 (0) 2762 / 4004198

E-Mail: info@pl-audio.de

Web: www.pl-audio.de

General Safety References



Assembly accessories of PL-Audio loudspeaker systems may be used exclusively considering the assembly instruction and in accordance with the BGV C1 regulations. In order to keep the safety criteria it will be expressly pointed out that an overload can be caused in the event of non-observance of the assembly instruction, changes of any kind of the accessories as well as installing the accessories to systems of other manufacturers. All components may be connected only in the prescribed way and used in such a way.

General Assembling Instructions



For attachment at trusses, ceilings, walls etc. fixing material with sufficient ratings is to be used (DIN 18800). All such mountings are to be done by an experienced person. For all screw connections the given maximum ratings for the torques are to be kept (DIN 898).

Safeguards



Loudspeaker systems are to be secured within the range of a stage or studios against tilting or falling down according to GUV 6.15 (BGV C1). This must happen with help of steel cables “(Safeties)” and/or chains, which are dimensioned for this working-load. A use of plastic-encased wire ropes is not permissible expressly. The safety devices specified in the regulations as well as the maximum head of 20cm are to be kept. Flown loudspeakers must be secured always against falling down by an additional, independent suspension point. This happens e.g. with a sufficiently dimensioned steel cable “(Safety)”.

Safety Factors



Accessories for the attachment of loudspeaker enclosures and PA systems are safety-relevant parts, which can endanger lives and health of humans during failure. Therefore the following guidelines were written, whose safety factors are to be kept. These are very highly put on due to wear, continuous stress etc. that also after use for many years still further safe handling can be ensured. Unfortunately many regulations in the reference to safety factors cannot be assigned always clearly and are often handled country-specifically.

Various standards specify the safety factors:

| Factors according to BGV C1: | Safety Factor |
|--|----------------------|
| Chains, ropes, shackles, eye bolts, belts, hooks | 12 |
| Accessories and their connection elements in mobile use | 10 |
| Accessories and their connection elements for fixed installation | 5 |

The maximum working load of manufacturers of commercial lifting and rigging hardware show usually other safety factors than demanded in the stage and studio areas.

| Table according to DIN 292-2: | Safety Factor |
|-------------------------------|---------------|
| Wire ropes | 5 |
| Chains from welded links | 4 |
| Textile fiber belts | 7 |
| Metal parts | 4 |

Inspection & Maintenance



For safety-relevant reasons a regular inspection of the accessories is inevitable. Prior to each use inspect the loudspeaker enclosures for any wear, deformation, notches, cracks and corrosion. Replace any damaged accessories immediately. In many states the regular inspection of attachment and accessories is prescribed. It is advisable to accomplish an annual inspection according to BGV C1 every 4 years by experienced technical personnel and additionally of a certified expert. In this connection leading of a test book is important, in which all accessories with their data and the recurring inspection are registered and are thus available at any time for potential controls.

Mounting Instructions

The flying bracket with item number

1611

in addition with adapters - item number

15010

is designed for mounting following loudspeaker(s):

Big Banana or **Banana**

in combination with one additional loudspeaker of type


Banana

Information about mounting equipment


| | | |
|----------------------------------|-----|---------------------------------|
| Thread size of fastener: | M20 | - Strength category minimum 5.8 |
| Thread size of clamping element: | M10 | - Strength category minimum 5.8 |

Assembly steps


- 1) Mount suitable fastener according DIN 15560-24:1996-12 or DIN 15560-1987-01 by sticking through the centered hole of the cross bar between both tabs of the flying bracket. For that assemble the defined bolt (M20), thread nut and lock washer to the flying bracket. The lock washer has to be placed between thread nut and flying bracket. Please note the information provided by the manufacturer of the fastener.




- 2) Tighten bolt and thread nut according manufacturer information.
- 3) Push flying bracket from the reverse side of the loudspeaker "Big Banana" or "Banana". Place the left and right adapter on the bracket lugs from the outside. Then, place two rubber rings on each side of the loudspeaker between the bracket lugs and the fastening thread.

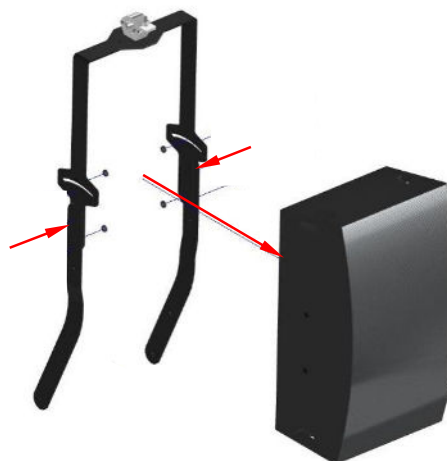


- 4) Insert three of the adjustable clamping levers (type GN 300-63-M10-25-SW) from the outside through the adapters, the bracket tabs and the rubber rings and finally screw them into the corresponding mounting threads of the loudspeaker.

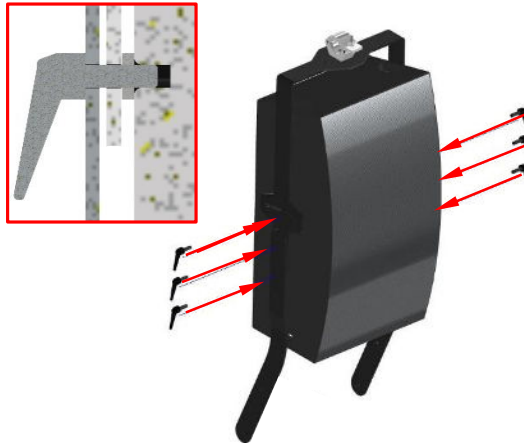

- 5) Push adapters from the reverse side of the loudspeaker "Banana". Then, place two rubber rings on each side of the loudspeaker between the adapters and the fastening thread.

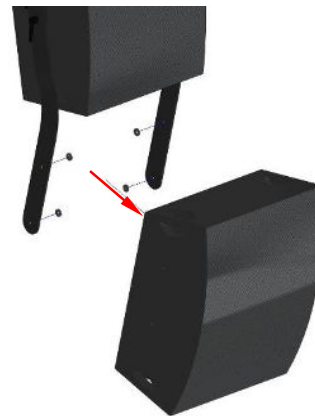

- 6) Insert two of the adjustable clamping levers (type GN 300-63-M10-25-SW) from the outside through each of the adapters and the rubber rings and finally screw them into the corresponding mounting threads of the loudspeaker.

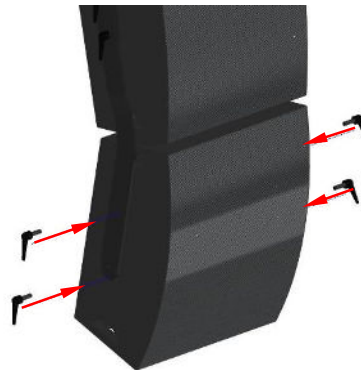

- 7) The flying bracket has to be secured additionally against tilting or falling down when using it. Thus, direct the load supporting device or sling through the top of the loudspeaker and the cross bar of the flying bracket and ensure, that the maximum falling depth does not exceed 20cm.